

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
7 April 2005 (07.04.2005)

PCT

(10) International Publication Number
WO 2005/031702 A1

(51) International Patent Classification⁷: G10L 11/00

(21) International Application Number:
PCT/BE2004/000116

(22) International Filing Date: 11 August 2004 (11.08.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/494,375 11 August 2003 (11.08.2003) US
60/564,054 21 April 2004 (21.04.2004) US

(71) Applicant (for all designated States except US): FAC-
ULTÉ POLYTECHNIQUE DE MONS [BE/BE];
Boulevard Dolez 31, B-7000 Mons (BE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): BOZKURT, Baris


[TR/BE]; Rue Rogier 16/1, B-7000 Mons (BE). DU-
TOIT, Thierry [BE/BE]; Rue Odon Rosier 15, B-7332
Sirault (BE). D'ALESSANDRO, Christophe [FR/FR];
Rue Faubourg Saint Antoine 291, F-75011 Paris (FR).
DOVAL, Boris [FR/FR]; Rue Poliveau 20, F-75005 Paris
(FR).

(74) Agents: VAN MALDEREN, Joëlle et al.; Office Van
Malderen, Place Reine Fabiola 6/1, B-1083 Brussels (BE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

[Continued on next page]

(54) Title: METHOD FOR ESTIMATING RESONANCE FREQUENCIES

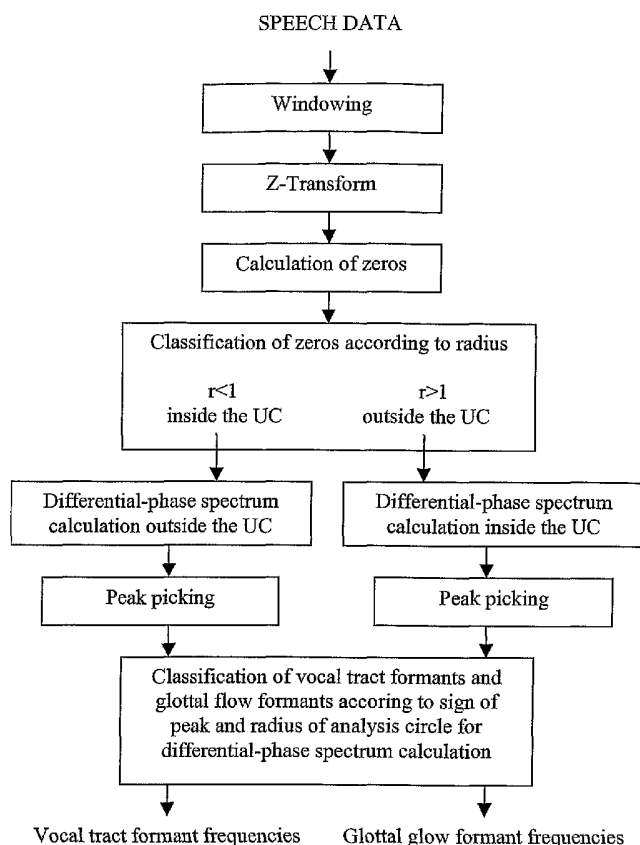

(57) Abstract: The present invention is related to a method for estimating from an input signal the resonance frequencies of a system modelled as a source and a filter, comprising the steps of - determining the Z-transform of the input signal, - calculating the differential-phase spectrum of the Z-transformed input signal, whereby the Z-transform is evaluated on a circle centered around the origin of the Z-plane, - detecting the peaks on said differential-phase spectrum, - attributing the peaks to either the source or the filter, - estimating the resonance frequencies from the peaks.

WO 2005/031702 A1



(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— with international search report

5

METHOD FOR ESTIMATING RESONANCE FREQUENCIES**Field of the invention**

10 [0001] The present invention is related to an analysis technique for recorded speech signals that can be used in various fields of speech processing technology.

State of the art

15 [0002] In all fields of speech processing, the basic source-filter speech model is very frequently used. It mainly assumes that the speech signal is produced by exciting a filter (corresponding to vocal tract), i.e. by an excitation produced by the lung pressure and larynx
20 (source signal or the glottal flow signal).

[0003] Decomposition of the two systems (the source and the filter (or the vocal tract)) has been an interesting problem in all areas of speech processing. The source and the filter characteristics provide very useful
25 information for speech applications. In many applications, removing one system's effect on the other improves the quality of analysis performed by the application. For example, in speech synthesis, source signal characteristics estimation is very important for voice quality analysis of
30 speech, database labelling (for voice quality and prosodic events), speech quality modification (emotional speech synthesis). Both systems (the source and the tract) show some resonance characteristics, which are considered to be their essential features. These resonances are called the

formants and their estimation has been studied by various researchers, especially for the filter part. However, estimation of the spectral resonance of the source (called the glottal formant) as presented in the present application is rather a new concept.

[0004] In a more theoretical framework, resonances of speech signals are modelled with poles in the z-domain. Linear predictive (LP) analysis is the most frequently used technique for estimating signal resonances by pole estimation. Based on an all-pole model, LP analysis estimates poles of a system, which correspond to resonances of a signal. Once the resonances are estimated with LP analysis, the problem is reduced to relating source and tract resonances respectively, a difficult and important problem in speech processing technology. There are many difficulties and inefficiencies of LP estimation due to various problems like non-linear source-tract interaction, dependency on degree of linear prediction and separating source resonances from vocal tract.

[0005] Despite the disadvantages of LP analysis, various methods have been proposed for source-tract separation using LP analysis. One of the well-known algorithms is the Pitch Synchronous Iterative Adaptive Inverse Filtering (PSIAIF) (see '*Glottal Wave Analysis with PSIAIF*', Alku, *Speech Communication*, vol.11, pp.109-117, 1992), which tries to perform the separation by an iterative linear prediction analysis. There also exist methods based on the linear prediction analysis together with glottal flow models. All of these techniques suffer from the deficiencies of the LP approach because LP estimation is hard-coded in these techniques.

[0006] Current state of art based on LP autocorrelation analysis is capable of detecting speech signal resonances but incapable of detecting anti-causal

and causal resonances respectively, which proves to be a major drawback.

[0007] The two approaches closest to the methodology adopted in the present invention, are those of Rabiner
5 (*'System for automatic formant analysis of voiced speech'*, Rabiner and Schafer, *JASA*, vol.47, no.2/2, pp. 634-648, 1970) and Murthy and Yegnanarayana (*'Formant extraction from group delay function'*, *Speech Communication*, vol.10, no.3, pp. 209-221, August 1991). Both methodologies are
10 based on spectral processing of speech. Rabiner's approach is based on analysis of the Z-transform amplitude spectrum and Murthy's on the minimum phase group delay function derived from amplitude spectrum. In both cases one of the most important method steps is the cepstral smoothing.

15

Aims of the invention

[0008] The present invention aims to provide a method for estimating the formant frequencies for vocal tract and glottal flow, directly from speech signals. The
20 invention further aims to provide a computer program that implements such a method.

Summary of the invention

[0009] The present invention relates to a method for
25 estimating from an input signal the resonance frequencies of a system modelled as a source and a filter, comprising the steps of

- determining the Z-transform of the input signal,
- calculating the differential-phase spectrum of the Z-transformed input signal (without using the amplitude
30 spectrum), whereby the Z-transform is evaluated on a circle centered around the origin of the Z-plane,
- detecting the peaks on the differential-phase spectrum,

- attributing the peaks to either the source or the filter,
- estimating the resonance frequencies from the peaks.

[0010] In a preferred embodiment the circle on which
5 the Z-transform is evaluated, is different from the unit circle in the Z-plane. Advantageously, the Z-transform of the input signal is evaluated on more than one circle.

[0011] In another embodiment the input signal is windowed.

10 [0012] Typically the input signal is a speech signal.

[0013] Preferably the source is a glottal flow signal and the filter is a vocal tract system.

[0014] In an advantageous embodiment the step of
15 attributing the peaks is performed based on the sign of said peaks. Said step of attributing is preferably further based on the radius of said circle.

[0015] In an alternative embodiment the method for
20 estimating the resonance frequencies further comprises the step of removing zeros of the input signal's Z-transform before performing the step of calculating the differential-phase spectrum.

[0016] In a second object the invention also relates
25 to a program, executable on a programmable device containing instructions, which, when executed, perform the method as described above.

Short description of the drawings

[0017] Fig. 1 represents the source-filter speech
30 model.

[0018] Fig. 2 shows the anti-causal character of the glottal flow signal. a) a causal filter response, b) an anti-causal filter response, c) a typical glottal flow signal.

[0019] Fig. 3 represents a causal and an anti-causal single pole filter response plots: a)causal impulse response, b)log-amplitude spectrum of a), c)group delay spectrum of a), d)anti-causal impulse response, e)log-
5 amplitude spectrum of d), f)group delay spectrum of d).

[0020] Fig. 4 represents a mixed phase all-pole signal with causal resonances at 1000 Hz and 2000 Hz and anti-causal resonances at 500 Hz and 1500 Hz. a)time domain signal, b)log-amplitude spectrum, c)group delay spectrum,
10 d)poles on z-plane-cartesian coordinates, e)poles on z-plane-polar coordinates.

[0021] Fig. 5 shows the effect of zeros on the group delay function, a) Zeros of Z-Transform (ZZT) plotted in polar coordinates (region of zeros close to the unit circle
15 indicated by dashed lines), b) group delay function with ZZT close to unit circle superimposed.

[0022] Fig. 6 represents an example of differential-phase spectrum analysis of synthetic speech.

[0023] Fig. 7 represents a flowchart of the method
20 according to the invention.

Detailed description of the invention

[0024] The invention targets the estimation of resonance frequencies (formant frequencies) of the source
25 and the vocal tract contributions directly from the speech signal itself.

[0025] As will be shown, the source-tract separation problem needs to be handled with tools, which can detect anti-causal resonances. The technique according to the
30 invention is more effective than current state of art methods, mainly because it is capable of detecting causal and anti-casual resonances without utilisation of a particular model of analysis, but only with spectral peak

analysis. Additionally, the technique has no dependency on analysis degrees as in LP analysis systems.

[0026] The source-filter model (see Fig.1) is usually accompanied by the assumption that a speech signal is a physical system output and therefore it is the output of a stable filter system. In a stable causal linear time invariant system, all the resonances of the signal shall correspond to poles inside the unit circle in z-plane. Once it is also assumed that the system is all-pole (i.e., the system can be defined by only poles and a gain factor), one ends up with a minimum phase system (the systems having all zeros and poles inside the unit circle are classified as minimum phase systems). Speech signals have been assumed to be minimum-phase signals for long years in many studies.

[0027] Here a mixed-phase speech model is applied, where some signal resonances correspond to poles outside the unit-circle but these poles are anti-causal, therefore still stable. These anti-causal poles correspond to resonances of the glottal source signal and causal-stable poles (inside the unit circle) correspond to the vocal tract resonances.

[0028] A signal $x(n)$ is said to be causal if $x(n)=0$ for all negative values of n . By reversal of $x(n)$ in time domain, an anti-causal signal $x(-n)$ is obtained. The version of $x(-n)$ time shifted to positive time indexes is also referred to as anti-causal, because the filter characteristics are time-reversed. Shifting the signal in time only introduces a linear phase component to the signal (a DC component is added to the group delay spectrum) and the amplitude spectrum is unaffected.

[0029] The anti-causality assumption for the source is based on the characteristics of glottal flow models (as explained in detail in '*Spectral correlates of glottal*

waveform models: an analytic study', Doval and d'Alessandro, Proc. ICASSP 97, Munich, pp. 446-452). One easy explanation is through visual inspection of signal waveforms. In Fig.2 an example glottal flow signal is presented together with a causal and an anti-causal filter response. The glottal flow signal has the same characteristics as the anti-causal response, namely a slowly increasing function with a rather sharper decay. The glottal flow signals can be modelled by an all-pole system where the poles are anti-causal. For stability of an anti-causal all-pole system, all of the poles have to be out of the unit circle and therefore the system is maximum phase.

5
10
15
[0030] The mixed-phase model assumes speech signals have two types of resonances: anti-causal resonances of the source (glottal flow) signal and causal resonances of the vocal tract filter. The invention aims to estimate these resonances from the speech signal. The estimation method is based on analysis of 'differential-phase spectra'.

20
25
30
[0031] The closest concept to differential-phase spectra is the group delay, so the differential-phase spectra will be introduced as a more general form of group delay. The source-tract separation is based on spectral analysis of causal and anti-causal parts of the speech signal. For such a target, the frequently used amplitude (or power) spectra offer very little help (if any). Rather the phase spectra have to be studied, since causality can only be observed in phase spectra. One of the main difficulties of phase analysis is its automatically wrapped nature. The phase spectra derivative however does not have the same property and various other advantages exist over both phase spectra and amplitude spectra. The group delay function $GD(\phi)$ is defined as the negative of derivative of

the argument $\theta(\phi)$ of $X(\phi)$, being the discrete Fourier transform of a signal $x(n)$.

$$X(e^{j\phi}) = DFT(x(n)) = a(\phi) + jb(\phi) \quad (\text{equation 1})$$

$$\mathcal{G}(\phi) = \arctan\left(\frac{b(\phi)}{a(\phi)}\right) \quad (\text{equation 2})$$

$$5 \quad GD(\phi) = -\frac{d(\mathcal{G}(\phi))}{d\phi} \quad (\text{equation 3})$$

The causality feature of a resonance is best observed on group delay spectra since a reversal of a signal in the time domain corresponds to no change in power spectrum of the signal but the group delay spectrum is inverted
 10 horizontally. In Fig. 3 the effects of time reversal on the amplitude spectrum and group delay function are presented on an example. The signal in Fig.3a is time reversed to obtain the signal in Fig. 3d. Comparison of Fig. 3b with Fig. 3e and Fig. 3c with Fig. 3f shows that the only change
 15 in frequency characteristics is horizontal inversion of the group delay function.

[0032] In Fig.4 a mixed phase signal (synthesised with all-pole model) and its group delay spectrum are presented. The mixed phase signal in Fig. 4 is synthesised
 20 by convolving a causal filter response with resonances at 1000 Hz and 2000 Hz and anti-causal filter response with resonances at 500 Hz and 1500 Hz. The causal and anti-causal resonances appear as peaks with opposite direction on the group delay spectrum where on the amplitude spectrum
 25 causality or anti-causality cannot be observed. Therefore, for analysis of causality of resonances of mixed-phase signals like speech, group delay function processing (obtained from phase information) is advantageous to amplitude spectrum processing.

30 [0033] However, observation of these opposite direction peaks on group delay spectra for real speech

signals is not easy due to existence of roots (zeros) of the z-transform located very closely to the unit circle on the z-plane. Each zero causes a spike in the group delay function masking important details of group delay function in that particular frequency region. The literal explanation is as follows : the Discrete Fourier Transform (DFT) of a signal can be expressed as

$$X(e^{j\phi}) = G e^{(j\phi)(-N+1)} \prod_{m=1}^{N-1} (e^{j\phi} - Z_m) \quad (\text{equation 4})$$

where $X(e^{j\phi})$ denotes the z-transform of a discrete time sequence $x(n)$, the Z_m represent the roots of the z-transform and G is the gain factor. Each factor in (eq.4) corresponds, in the z-plane, to a vector starting at Z_m and ending at $e^{j\phi}$. Hence, where $e^{j\phi}$ gets very close to one of these zeros, one of the factors in (eq.4) gets very small in amplitude, and undergoes an important argument modification which corresponds to spiky change in the group delay function. So, a simple observation on group delay spectrums does not provide the desired information, the plots are usually too noisy due to the zeros close to unit circle. In Fig. 5b, a group delay function for a speech frame is presented together with zeros of z-transform of the same signal closely located to the unit circle. Each zero creates a spike in the group delay function hiding resonance peaks to appear as in Fig. 4.

[0034] In the solution according to the invention, the problem is first redefined in a more general framework of 'differential-phase spectrum'. The differential-phase spectrum is defined as the negative derivative of the phase spectrum calculated from the signal's z-transform, evaluated on a circle with any radius centered at the origin of the z-plane. This definition makes the group delay function a special case of differential-phase

spectrum, where the radius of the circle is $r=1$. Changing the radius from $r=1$ to other values yields a new circle in a region where zeros do not exist. By calculating differential-phase spectra at this new circle, the spiky effects of the zeros can be avoided and resonance peaks can be tracked. The invention advantageously makes use of the insight that signal resonances can be tracked from differential phase spectra calculated on circles with radius different from 1 (the unit circle), i.e. on circles with a radius either larger or smaller than 1. The analysis of more than one differential-phase spectrum is advantageous for the estimation of source and tract characteristics due to the poles existing inside and outside the unit circle (though a single differential-phase spectrum can also reveal all causal and anti-causal resonances). Therefore the method preferably includes the step of processing more than one differential-phase spectrum calculated at circles with different radius, as this yields an improved robustness.

[0035] The resulting differential-phase spectra are much less noisy than group delay functions, but still zeros may exist anywhere in the z -plane. A single unexpected zero causes the same type of spiky effect for the frequency regions, where the zero is close to the analysis circle. In order to get rid of this effect, a zero-removal technique is proposed that effectively calculates noise-free differential-phase spectra. The procedure comprises the steps of:

- estimating zeros (roots of z -transform polynomial of the speech signal) with a numerical method,
- removing or displacing zeros from z -plane regions, where the differential-phase spectrum is to be calculated, and

- calculating the differential-phase spectrum at this region from the remaining zeros.

[0036] The roots (zeros) of a z-transform polynomial can be determined by a numerical method. The obtained set of roots of z-transform polynomial can be divided into two sets of roots (which corresponds to dividing the z-transform polynomial into two polynomials). The obtained two sets of roots correspond to the spectral representation of glottal flow and vocal tract contributions of speech signal : when classifying the roots according to their distance to the origin of the z-plane (i.e. their radius), roots outside the unit circle are classified as glottal flow roots and roots inside the unit circle as vocal tract roots. For estimation of the characteristics of one of the systems, it is preferred to remove the set roots corresponding to the other system and then perform analysis. For example, for estimation of vocal tract characteristics, glottal flow roots which are out of the unit circle, are removed from the complete set of zeros and then the differential-phase spectrum calculation is performed.

[0037] By additionally applying this zero-removal method, no zeroes close to analysis circle will be left and the differential-phase spectrum obtained will not include zero spikes.

[0038] An example on synthetic speech analysis is presented in Fig.6 for the zero-removal technique and its effect to differential-phase spectrum. The first row of plots include the actual amplitude spectrum of glottal flow (Fig.6a) and the amplitude spectrum vocal tract (Fig.6b) used in synthesis. The aim is to estimate the resonance peak (formant) locations of these two systems directly from the speech signal, which is constructed by convolution of these two systems and an impulse train to obtain several

cycles of speech signal. An all-pole vocal tract filter (of a typical vowel "a" with normalised resonance frequencies at 0.075, 0.15, 0.275, 0.4 for 16000 Hz) is used for synthesis. This synthetic speech signal is windowed for analysis. Estimation of formant frequencies by peak picking on differential-phase analysis at two circles are aimed: $r=0.95$ and $r=1.05$. The ZPT of windowed speech signal is presented in Fig. 6c and Fig. 6d with the analysis circles indicated on top. The differential-phase spectra obtained on the indicated analysis circles are presented in Fig. 6e and Fig. 6f respectively. Since zeros close to analysis circles exist, the resulting differential-phase spectra are noisy. To get rid of this effect, zeros close to the analysis circle are removed (as plotted in Fig. 6g and Fig. 6h) and differential-phase spectra are re-calculated. The resulting differential-phase spectra are presented in Fig. 6i and Fig. 6j. Peak picking is performed on these spectra and sign and frequencies of the peaks are stored. The negative peak in Fig. 6i will be classified as glottal formant peak and the positive peaks on Fig. 6j will be classified as vocal tract formant peaks in the final decision.

[0039] Finally, Fig.7 summarises the method according to the invention in a flowchart. The various steps are as described previously.

CLAIMS

1. Method for estimating from an input signal the resonance frequencies of a system modelled as a source and a filter, comprising the steps of
- 5 - determining the Z-transform of said input signal,
- calculating the differential-phase spectrum of said Z-transformed input signal, said Z-transform thereby being evaluated on a circle centered around the origin of the Z-plane,
- 10 - detecting the peaks on said differential-phase spectrum,
- attributing said peaks to either said source or said filter,
- estimating said resonance frequencies from said peaks.
2. Method for estimating the resonance frequencies as in claim 1, wherein said circle is different from the unit circle in the Z-plane.
3. Method for estimating the resonance frequencies as in claims 1 or 2, wherein said Z-transform of said input signal is evaluated on more than one circle.
- 20 4. Method for estimating the resonance frequencies as in any of the previous claims, wherein said input signal is windowed.
5. Method for estimating the resonance frequencies as in any of the previous claims, wherein said input signal is a speech signal.
- 25 6. Method for estimating the resonance frequencies as in any of the previous claims, wherein said source is a glottal flow signal.
7. Method for estimating the resonance frequencies as in any of the previous claims, wherein said filter is a vocal tract system.
- 30 8. Method for estimating the resonance frequencies as in any of the previous claims, wherein the

step of attributing said peaks is performed based on the sign of said peaks.

9. Method for estimating the resonance frequencies as in claim 8, wherein said step of attributing
5 is further based on the radius of said circle.

10. Method for estimating the resonance frequencies as in any of the previous claims, further comprising the step of removing zeros of said input signal's Z-transform before performing the step of
10 calculating said differential-phase spectrum.

11. A program, executable on a programmable device containing instructions, which, when executed, perform the method as in any of the previous claims.

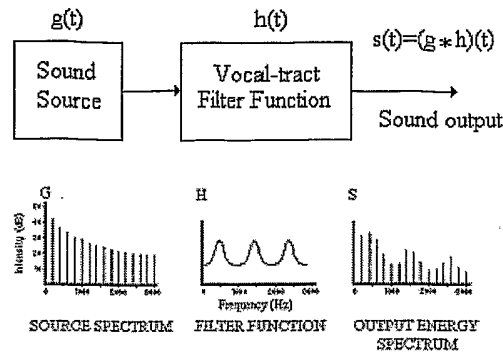


Fig. 1

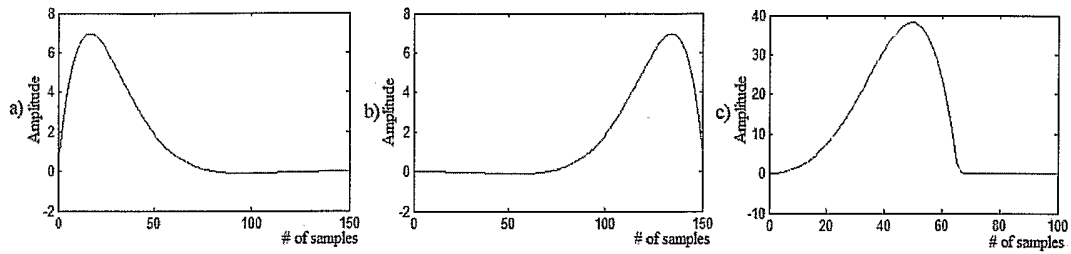


Fig. 2

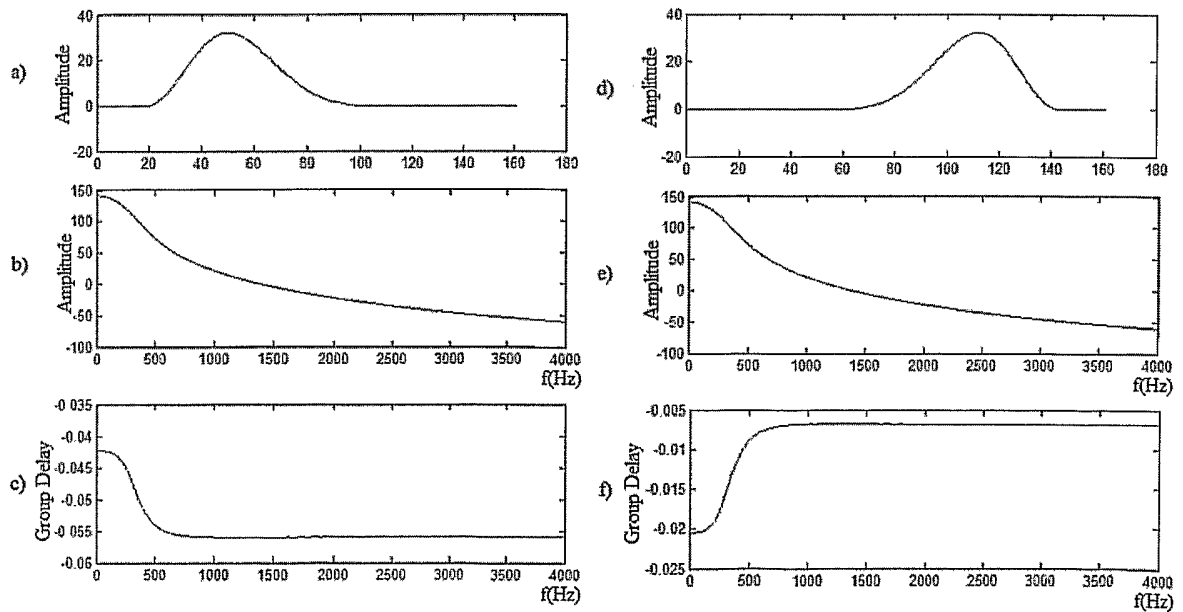


Fig. 3

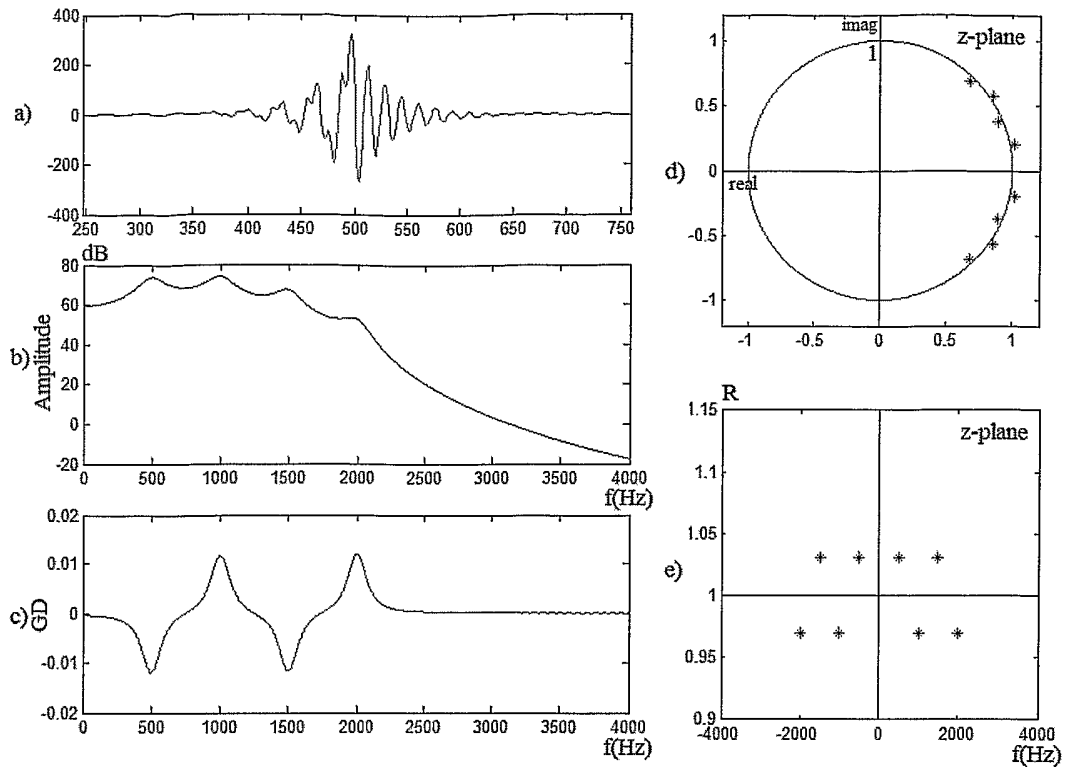


Fig. 4

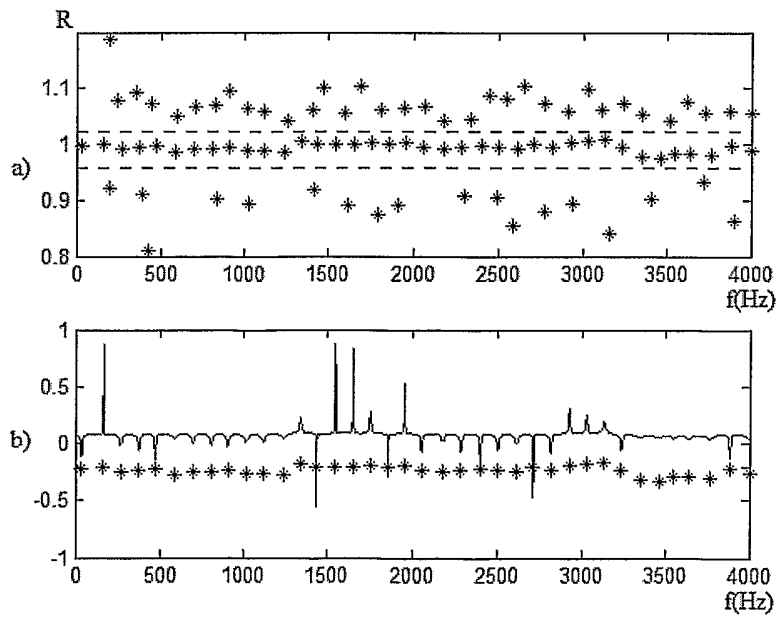


Fig. 5

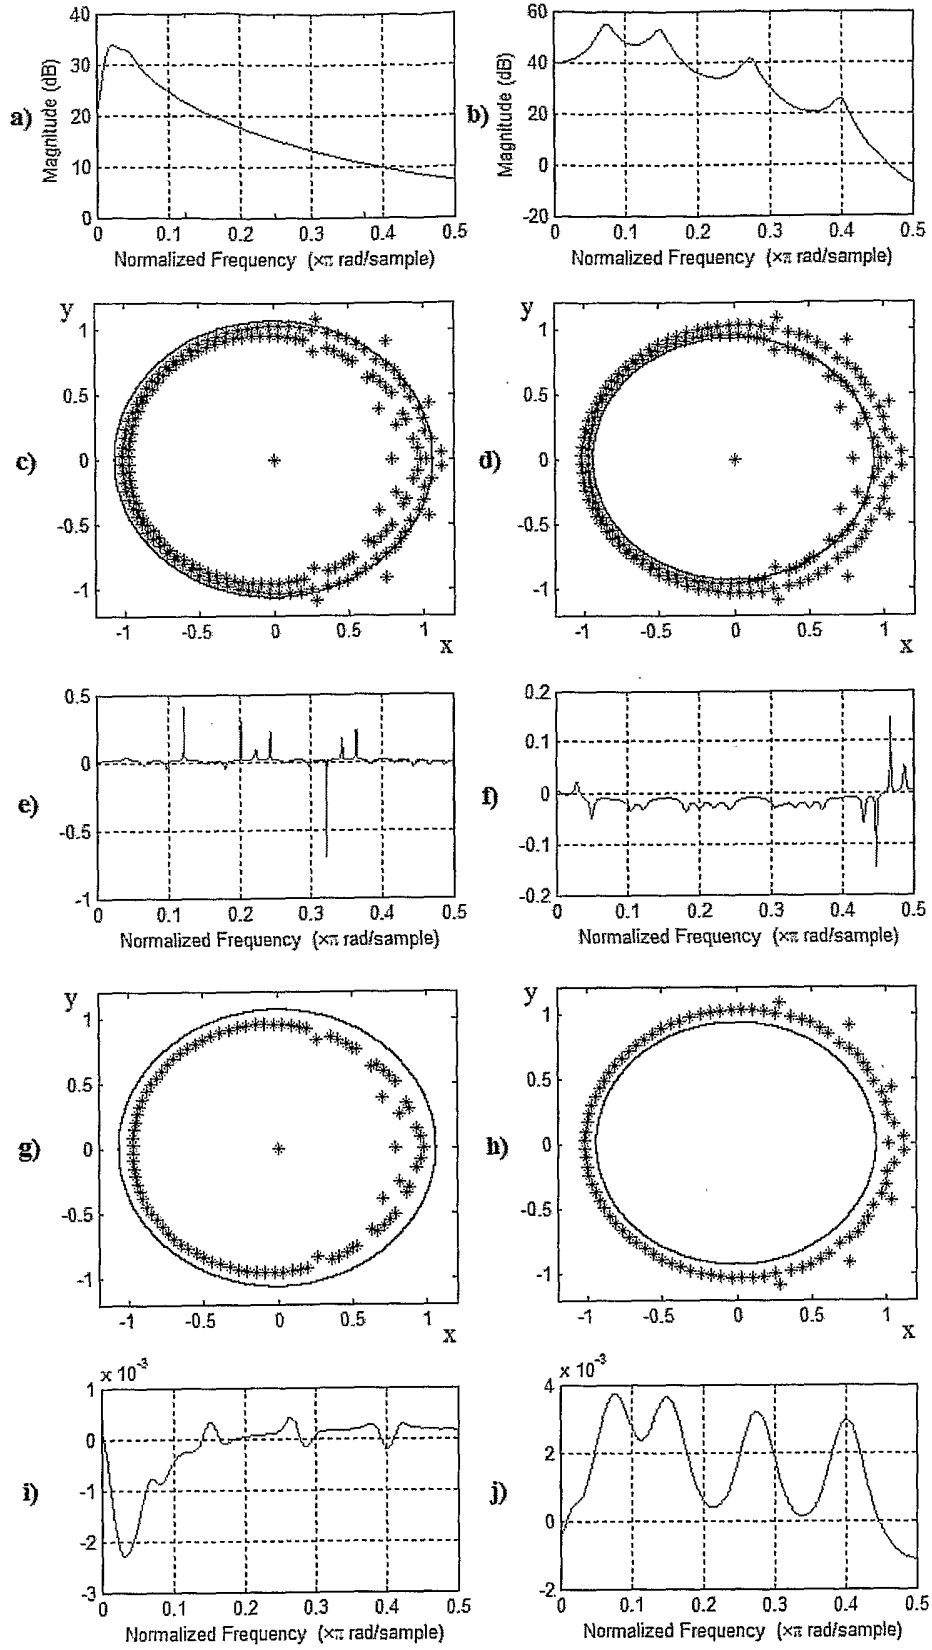


Fig.6

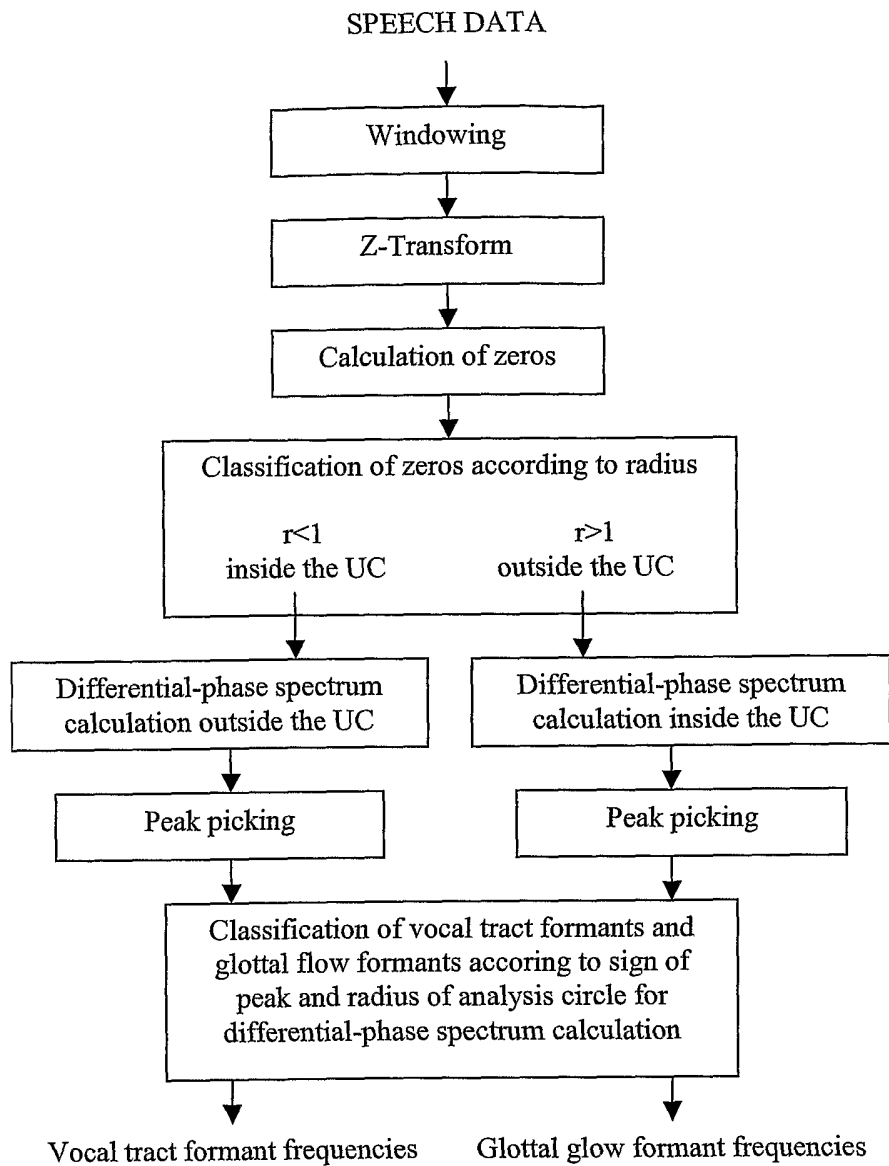


Fig.7

INTERNATIONAL SEARCH REPORT

International Application No
T/BE2004/000116

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G10L11/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 G10L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, INSPEC, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, X	<p>B. BOZKURT AND T. DUTOIT: "Mixed-Phase Speech Modeling and Formant Estimation, Using Differential Phase Spectrums" PROC. ISCA ITRW VOQUAL 2003, 'Online! 27 August 2003 (2003-08-27), pages 21-24, XP002312214 GENEVA, SWITZERLAND Retrieved from the Internet: URL: http://tcts.fpms.ac.be/publications/papers/2003/voqual03_bbttd.pdf 'retrieved on 2004-12-02! the whole document</p> <p style="text-align: center;">----- -/--</p>	1-11

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

° Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

30 December 2004

Date of mailing of the international search report

14/02/2005

Name and mailing address of the ISA
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Van Doremalen, J

INTERNATIONAL SEARCH REPORT

national Application No
T/BE2004/000116

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,A	<p>B.DOVAL, C.D'ALESSANDRO, NATHALIE HENRICH: "The Voice Source as a causal/anticausal linear filter" PROC. ISCA ITRW VOQUAL 2003, 'Online! 27 August 2003 (2003-08-27), pages 15-20, XP002312215 GENEVA, SWITZERLAND Retrieved from the Internet: URL:http://www.isca-speech.org/archive/arc hive_papers/voqual03/voq3_015.pdf> 'retrieved on 2004-12-02! the whole document</p>	1-11
Y	<p>----- DATABASE INSPEC 'Online! THE INSTITUTION OF ELECTRICAL ENGINEERS, STEVENAGE, GB; 1990, JACKSON L B: "Noncausal ARMA modeling of voiced speech" XP002312218 Database accession no. 3517863 abstract paragraph '00II! & JACKSON LELAND B: "Noncausal ARMA modeling of voiced speech" IEEE TRANSACTIONS ON ACOUSTICS, SPEECH, AND SIGNAL PROCESSING, vol. 37, no. 10, October 1989 (1989-10), pages 1606-1608, IEEE Transactions on Acoustics, Speech and Signal Processing USA ISSN: 0096-3518</p>	1-9,11
Y	<p>----- DATABASE INSPEC 'Online! THE INSTITUTION OF ELECTRICAL ENGINEERS, STEVENAGE, GB; 1985, REDDY N S ET AL: "High-resolution formant extraction from linear-prediction phase spectra" XP002312216 Database accession no. 2427409 abstract</p> <p style="text-align: center;">-/--</p>	1-9,11

INTERNATIONAL SEARCH REPORT

International Application No

CT/BE2004/000116

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
	<p>& N. SRIDHAR REDDY AND M.N.S. SWAMY: "High-Resolution Formant Extraction from Linear-Prediction Phase Spectra" IEEE TRANSACTIONS ON ACOUSTICS, SPEECH AND SIGNAL PROCESSING, vol. ASSP-32, no. 6, 6 December 1984 (1984-12-06), pages 1136-1144, USA ISSN: 0096-3518 page 1136, right-hand column, line 33 - line 43 page 1138, left-hand column, line 21 - right-hand column, line 8 page 1142, right-hand column, line 18 - line 25</p>	
A	<p>----- DATABASE INSPEC 'Online! THE INSTITUTION OF ELECTRICAL ENGINEERS, STEVENAGE, GB; 1989, DUNCAN G ET AL: "A nonparametric method of formant estimation using group delay spectra" XP002312217 Database accession no. 3472036 abstract page 572, right-hand column, line 1 - line 12 page 573, left-hand column, line 48 - right-hand column, line 2 paragraph '0004! & ICASSP-89: 1989 INTERNATIONAL CONFERENCE ON ACOUSTICS, SPEECH AND SIGNAL PROCESSING (IEEE CAT. NO.89CH2673-2) 23-26 MAY 1989 GLASGOW, UK, 23 May 1989 (1989-05-23), - 26 May 1989 (1989-05-26) pages 572-575 vol.1, ICASSP-89: 1989 International Conference on Acoustics, Speech and Signal Processing (IEEE Cat. No.89CH2673-2) IEEE New York, NY, USA</p>	1,11
A	<p>----- DATABASE INSPEC 'Online! THE INSTITUTION OF ELECTRICAL ENGINEERS, STEVENAGE, GB; 1997, DOVAL B ET AL: "Spectral correlates of glottal waveform models: an analytic study" XP002312219 Database accession no. 5730449 cited in the application abstract</p> <p style="text-align: center;">-/--</p>	1

INTERNATIONAL SEARCH REPORT

International Application No
P/BE2004/000116

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
	<p>& B.DOVAL AND C.D'ALESSANDRO: "Spectral correlates of glottal waveform models: an analytic study" 1997 IEEE INTERNATIONAL CONFERENCE ON ACOUSTICS, SPEECH, AND SIGNAL PROCESSING 21-24 APRIL 1997 MUNICH, GERMANY, vol. 2, 21 April 1997 (1997-04-21), pages 1295-1298 vol., 1997 IEEE International Conference on Acoustics, Speech, and Signal Processing (Cat. No.97CB36052) IEEE Comput. Soc. Press Los Alamitos, CA, USA ISBN: 0-8186-7919-0</p> <p style="text-align: center;">-----</p>	